

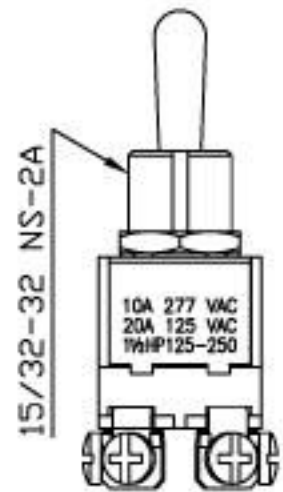


Rating	10A 277VAC, 20A 125VAC 1½HP 125-250VAC	Mount Hole		Circuit Structure	
Contact R	50m ohm Max.				
Insulation R	DC 500V 100M ohm Min.				
Dielectric Strength	AC 1500V 1 minute				
Circuit	4P DPST ON-OFF				
Operation Force	1200g±300g				

1 HEX NUT ASSY

1 HEX NUT IN BULK

KEYWAY

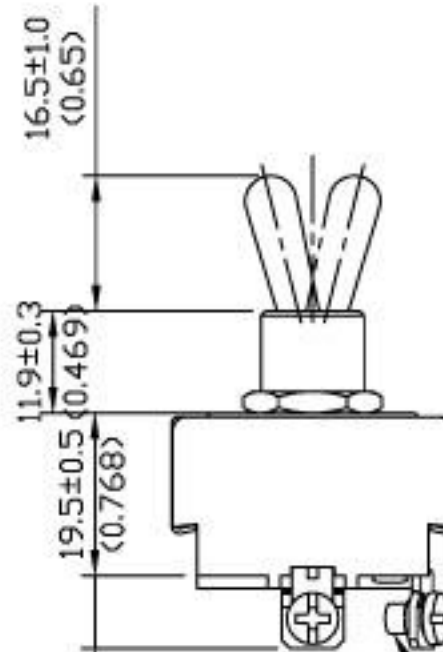

Unit

mm
(inch)

SPEMCO

1188/20

REV.

1